

DDR3 – Registered ULP (Ultra Low Profile) RDIMM



DESCRIPTION:

Virtium offers DDR3 registered ULP (Ultra Low Profile: 0.70" high) dual in-line memory module (RDIMM) in a selected range of densities, speeds and form factor.

The ULP form-factors are well suited for space constrained systems with height restrictions and low airflow requirements.

Virtium's ULP RDIMMs are designed to satisfy the demanding memory applications for Embedded, Telecom, Networking, Storage, Military, Aerospace and Ruggedized Computer marketplace.

FEATURES:

- 240-pin, ULP dual in-line memory module (RDIMM)
- Proposed JEDEC pin-out
- PC3-12800, PC3-10600, PC3-8500, PC3-6400
- VDD = VDDQ = 1.5V +/- 0.075V
- VDDSPD = 3V to 3.6V
- JEDEC standard 1.5V +/- 0.075V I/O (SSTL_15 compatible)
- Operating temperature: 0°C to 85°C
- Industrial temperature range also available
- 8 Banks
- 8-bit pre-fetch architecture
- Bi-directional Differential Data-Strobe
- Programmable Burst Length (8)
- On-die termination (ODT)
- Average Refresh Period 7.8us
- Serial presence detect with EEPROM
- Fly-by topology
- Lead-free, RoHS compliant

BENEFITS:

- Ultra Low Profile
- Low Power
- High densities
- High operational frequency

APPLICATIONS:


- Single Board Computers
- Embedded Computing Platforms
- Telecommunication Servers
- Networking & Storage Appliances
- Military & Aerospace Systems

ULP (Ultra Low Profile)

DENSITY	HEIGHT	THICKNESS	MAX SPEED	COMP. DENSITY	COMP. PACKAGE	COMP. CONFIG.	MODULE RANKS	CL	PART NUMBER
4GB	0.70"	0.320"	PC3-12800	1Gbit	BGA stack	x4	2	11	VL33B5168F-K0
4GB	0.70"	0.320"	PC3-10600	1Gbit	BGA stack	x4	2	9	VL33B5168F-K9
4GB	0.70"	0.320"	PC3-8500	1Gbit	BGA stack	x4	2	7	VL33B5168F-F8
2GB	0.70"	0.144	PC3-12800	1Gbit	Monolithic	x8	2	11	VL33B5663F-K0
2GB	0.70"	0.144	PC3-10600	1Gbit	Monolithic	x8	2	9	VL33B5663F-K9
2GB	0.70"	0.144	PC3-8500	1Gbit	Monolithic	x8	2	7	VL33B5663F-F8
1GB	0.70"	0.144	PC3-12800	1Gbit	Monolithic	x8	1	11	VL33B2863F-K0
1GB	0.70"	0.144	PC3-10600	1Gbit	Monolithic	x8	1	9	VL33B2863F-K9
1GB	0.70"	0.144	PC3-8500	1Gbit	Monolithic	x8	1	7	VL33B2863F-F8

Mechanical Outlines


ULP

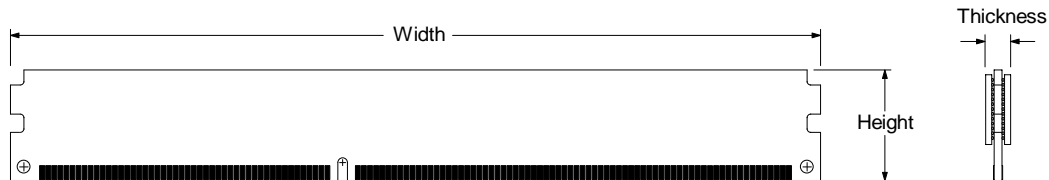

Unit	Width	Height	Thickness
Inches	5.25	0.70	0.144 - 0.320
Millimeters	133.35	17.78	3.67 - 8.15

Additional Virtium Memory Products

Virtium DDR3 UDIMM (Unbuffered) with ECC & Non-ECC

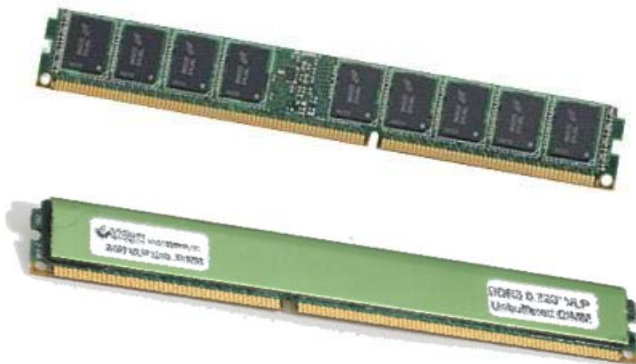

- 240-pin, dual in-line memory module
- Standard 1.181" and VLP 0.72" heights
- Unbuffered or UDIMM in 4GB, 2GB and 1GB densities
- Fast data transfer rates: PC3-12800, PC3-10600, PC3-8500 or PC3-6400
- JEDEC Standard form factor
- Targeted for high-speed operations
- RoHS compliance



Virtium Technology provides memory and solid state storage solutions for single board computers and high-reliability systems.

30052 Tomas, Rancho Santa Margarita, CA 92688 USA Tel 949.888.2444 www.virtium.com

Copyright © 2008 Virtium Technology, Inc. All rights reserved. Referenced products are trademarks or registered trademarks of their respective owners.